



Main Street
Creighton, 3263

P.O Box 62

Creighton 3263

Phone: +27 39 833 1038

Fax: +27 39 833 1179

Email: mailbox@ndz.gov.za

A Better Place for ALL

www.ndz.gov.za

ADDENDUM FOR MAINTENANCE OF CREIGHTON MAIN OFFICE DRIVEWAY
BID NO: PWBS-B041/23/24

Date:12/12/2023

The addendum serves to correct the CIDB grading, specification and pricing schedule for the above project, the bid document had CIDB 1CE on compulsory documents and our newspaper and website advert had CIDB 1GB.

See below corrected documents:

- i. We would like to consider both grading which is 1GB Only and 1CE Only.
- ii. Corrected Specification, Picture of the sign required and pricing schedule is attached.

N.B The project closing date has been extended for the 15th January 2024@12h00.

RECOMMENDED BY:

MISS N.HOLIWE
SCM MANAGER

APPROVED BY:

MR. N.C. VEZI
MUNICIPAL MANAGER

I acknowledge receipt of this Addendum No.1

Name:.....

Signature:.....

Date:.....

Name of Tenderer (Company Name):.....

A Better Place for All



CONSTRUCTION OF CREIGHTON DRIVEWAY

Removal of the existing asphalt material

Removal of the existing biometric system

Preparation, supply and lay G2 material

Stabilise the G2 material with lime cement and compact to the required 95% MOD

ASSTHO

Prime coat:

Supply and apply prime coat

MC-30 cut back bitumen 0.8l/m²

Supply and construct access with asphalt, 30mm thickness

Construction of bellmouth using asphalt material, 30mm thickness

Supply and install Figure 12 Kerbs for the bellmouth edge

Supply and spread topsoil, plant grass for the bank

Supply and apply asphalt for the potholes

Supply material and construct concrete

apron for the guardhouse to be 25MPa concrete strength

Supply material and construct concrete

paving for the guard house, to be 25MPa concrete strength

PARKING BAYS

Supply and install Figure 12 Kerbs for the edge parking bays

Supply and install Figure 8 Kerbs for the protection of the grass

Supply and spray tackcoat to the parking bays to remove old existing lines

Supply and apply white quality paint for road marking to the parking bays

CONSTRUCTION OF SIGNAGE

Construction of concrete base for the signage to be 15MPa concrete strength

Supply and install aluminum signage to be 1,0m in width and 2,5m in height

Supply and install directional signage in Creighton Main Offices labelled as follows with arrows:


1. EXECUTIVE AND COUNCIL OFFICE
2. DEPARTMENT OF FINANCE
3. DEPARTMENT OF PUBLIC WORKS AND BASIC SERVICES
4. DEPARTMENT OF SUPPLY CHAIN MANAGEMENT
5. DEPARTMENT OF BUDGET AND TREASURY
6. DEPARTMENT OF PLANNING AND DEVELOPMENT
7. DEPARTMENT OF COMMUNITY
8. DEPARTMENT OF CORPORATE SERVICES

ITEM	DESCRIPTION	UNIT	QTY	RATE	AMOUNT
	REPAIRS AND MAINTENANCE OF CREIGHTON DRIVEWAY				
	Site Establishment	sum	1		
1	Removal of the existing asphalt material	m2	650		
2	Removal of the existing biometric sytem	No	1		
3	Preparation, supply and lay G2 material	m3	95		
4	Stablise the G2 material with lime cement and compact to the required 95% MOD ASSTHO	m3	95		
5	Prime coat: Supply and apply prome coat MC-30 cut back bitumen 0.8l/m2	m2	650		
6	Supply and construct access with asphalt, 30mm thickness	m2	63		
7	Construction of bellmouth using asphalt material, 30mm thickness	m2	1,89		
8	Supply and install Figure 12 Kerbs for the bellmouth edge	m	20		
9	Supply and spread topsoil, plant grass for the bank	m2	150		
10	Supply and apply hot mix asphalt for the potholes throughout the whole municipality	Prov	1	R50 000,00	R50 000,00
11	Supply material and construct concrete apron for the guardhouse to be 25MPa concrete strength	m3	4		
12	Supply material and construct concrete paving for the guard hosue, to be 25MPa concrete strength	m3	1,2		
	PARKING BAYS				
13	Supply and install Figure 12 Kerbs for the edge parking bays	m	100		
14	Supply and install Figure 8 Kerbs for the protection of the grass	m	70		
15	Supply and spray tackcoat to the parking bays to remove old existing lines	No.	60		
16	Supply and apply white quality paint for road marking to the parking bays	No.	60		
	CONSTRUCTION OF SIGNAGE				

17	Construction of concrete base for the signage to be 15MPa concrete strength	m3	0,3		
18	Supply and install aluminum signage to be 1,0m in width and 2,5m in height				
19	Supply and install directional signage in Creighton Main Offices labelled as follows with arrows: 1. Reception 2. Cooperate Services 3. Visitor's Parking 4. Staff Parking Install Dr Nkosazana Dlamini Zuma Logo and name of municipality	Sum	1		
20	CLO	No.	1		
21	Security	No.	1	R4 600,00	R13 800,00
22	Sub-Total				
23	Contingences				
24	Vat 15%				
25	Total				

The project is a 3 months project and the liability period is 1 month

Labour rate is R175 per day

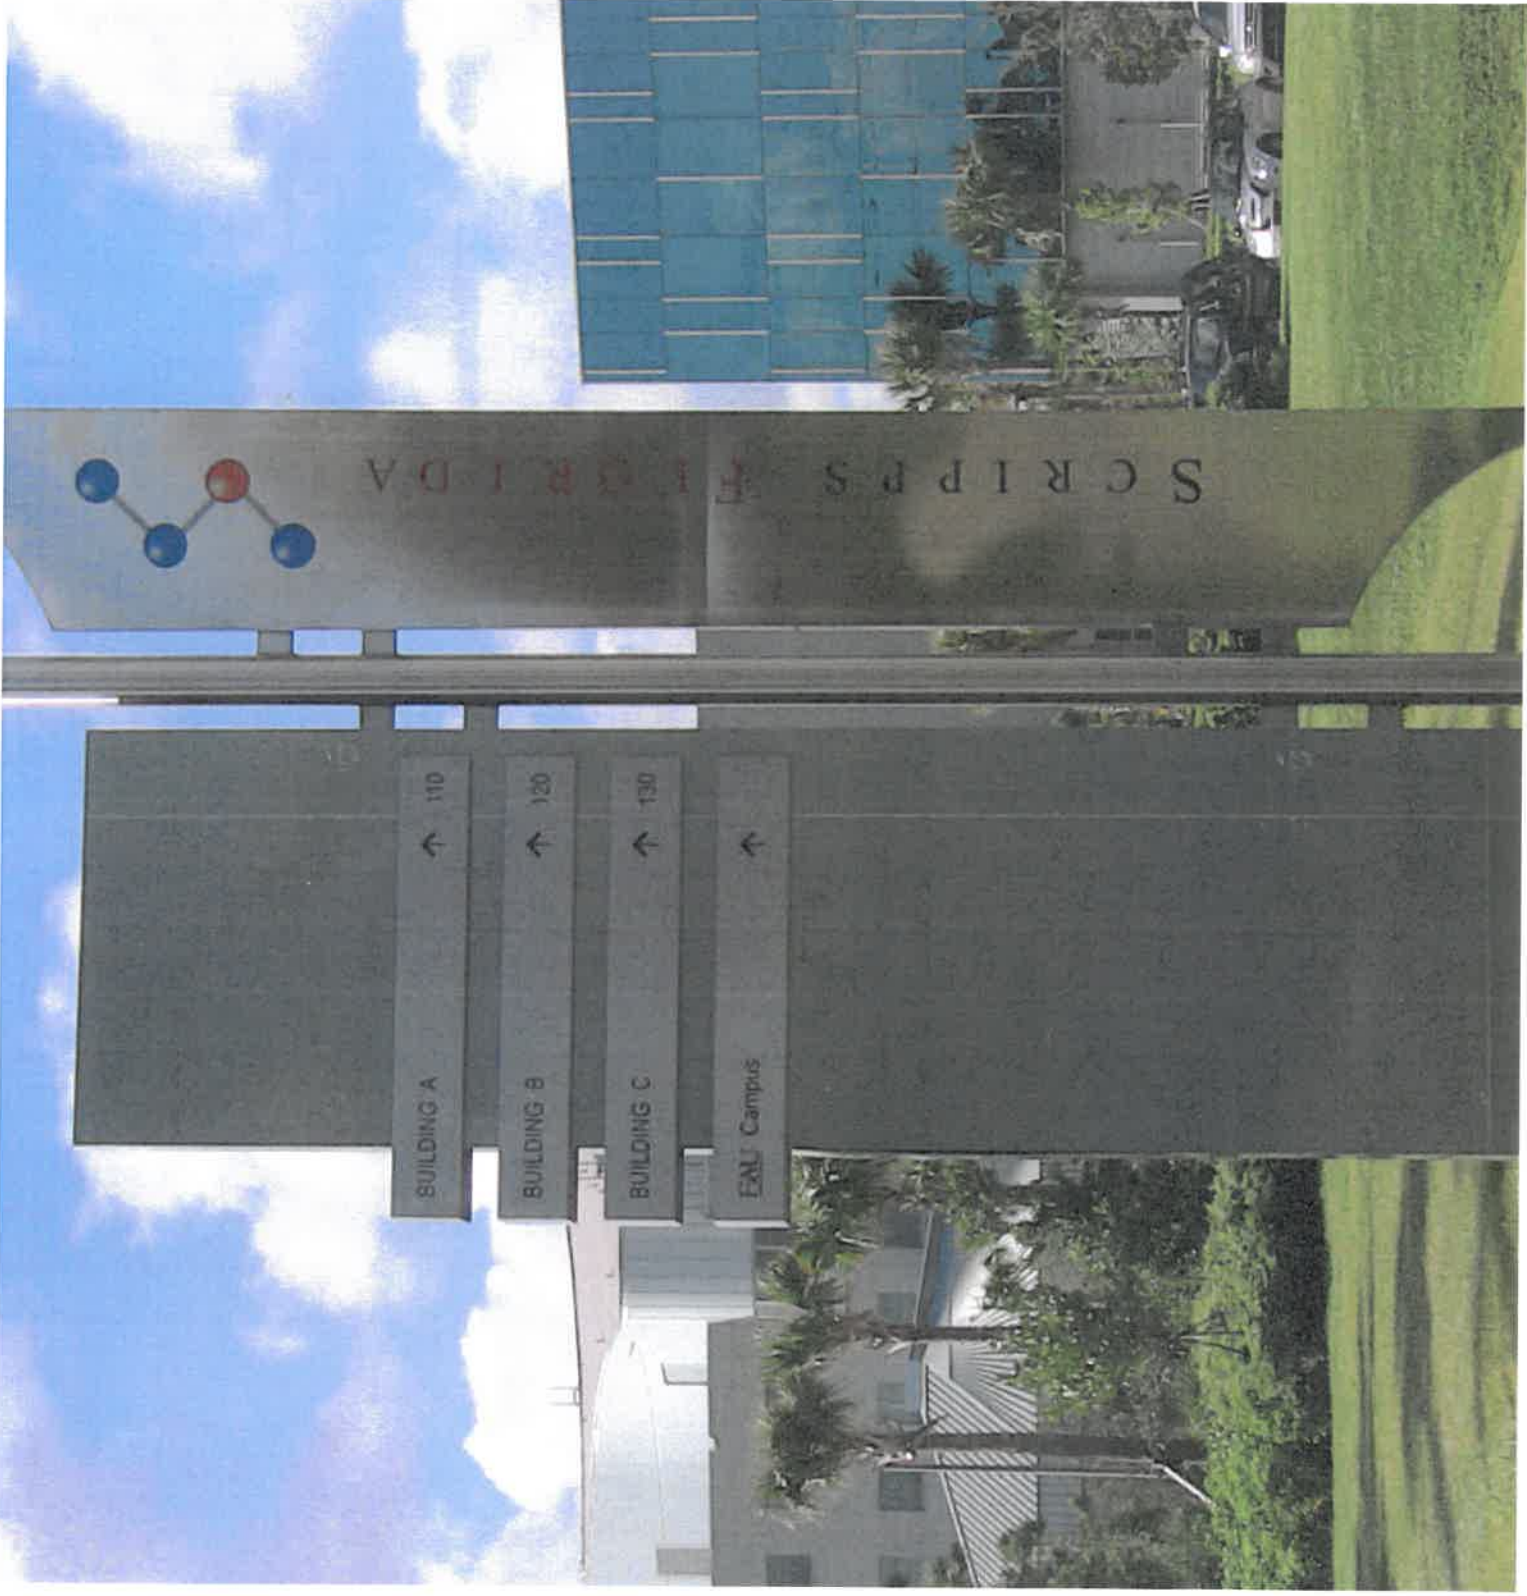

SCRIPPS FLORIDA

110



BUILDING A

120



BUILDING B

130



BUILDING C

EALU Campus

