



**A Better Place for ALL**

Main Street  
Creighton, 3263

P.O Box 62

Creighton 3263

Phone: +27 39 833 1038

Fax: +27 39 833 1179

Email: mailbox@ndz.gov.za

[www.ndz.gov.za](http://www.ndz.gov.za)

---

**ADDENDUM FOR A BID NO.: PWBS-: B024/21/22 CONSTRUCTION OF 3 GUARD HOUSE**

**DATE: 16 September 2021**

We have attached Guard house drawings.

There was only one bill of quantity on our bid document for 3 sites.

Please see below bill of quantity per site:

**CREIGHTON DUMP SITE  
CONSTRUCTION OF GUARD HOUSE**

ITEM	DESCRIPTION	UNIT	QUANTITY	RATE	TOTAL
	<b>CONSTRUCTION OF GUARD HOUSE</b>				
1	Site establishment	Sum	1		
2	Construction of security house with blockwork M200 inclusive of brickforce after every two courses	m2	30		
2.1	Supply and apply plaster on the internal walls with 15mm thickness	m2	126		
2.2	Supply and apply plaster on the external walls with 15mm thickness	m2	126		
2.3	Supply and install the concrete slab with 50mm thickness using 15MPa strength	m3	0.8		
2.4	Supply and install roof planks 38x155mm to be 3m in length each	m2	30		
2.5	Supply and install heavy duty iron zinc sheet with 0.5mm thickness	m2	30		
2.6	Supply and install glazing 1x1m with steel frames	No.	8		
2.7	Supply and apply quality (oil paint) PVA paint for the external walls EPL 272	m2	126		
2.8	Supply and apply quality (oil paint) PVA paint for the internal walls EPL 272	m2	126		
2.9	Supply and install rhino board ceiling with all fittings	m2	30		
2.10	Supply and apply white quality (oil paint) PVA to paint ceiling	m2	30		
2.11	Supply and install meranti single door and meranti frames, 3 Lever Union Key lock set with all fittings	No.	6		
2.12	Supply and install door awinings	No.	6		
3	Provision for CLO	No.	1	4000	12000
	<b>Sub Total</b>				
	<b>Contingencies @ 10%</b>				
	<b>Sub Total</b>				
	<b>Vat @ 15%</b>				
	<b>Total</b>				

**HIMEVILLE TRANSFER STATIONS  
CONSTRUCTION OF GUARD HOUSE**

ITEM	DESCRIPTION	UNIT	QUANTITY	RATE	TOTAL
	<b>CONSTRUCTION OF GUARD HOUSE</b>				
1	Site establishment	Sum	1		
2	Construction of security house with blockwork M200 inclusive of brickforce after every two courses	m2	30		
2.1	Supply and apply plaster on the internal walls with 15mm thickness	m2	126		
2.2	Supply and apply plaster on the external walls with 15mm thickness	m2	126		
2.3	Supply and install the concrete slab with 50mm thickness using 15MPa strength	m3	0.8		
2.4	Supply and install roof planks 38x155mm to be 3m in length each	m2	30		
2.5	Supply and install heavy duty iron zinc sheet with 0.5mm thickness	m2	30		
2.6	Supply and install glazing 1x1m with steel frames	No.	8		
2.7	Supply and apply quality (oil paint) PVA paint for the external walls EPL 272	m2	126		
2.8	Supply and apply quality (oil paint) PVA paint for the internal walls EPL 272	m2	126		
2.9	Supply and install rhino board ceiling with all fittings	m2	30		
2.10	Supply and apply white quality (oil paint) PVA to paint ceiling	m2	30		
2.11	Supply and install meranti single door and meranti frames, 3 Lever Union Key lock set with all fittings	No.	6		
2.12	Supply and install door awinings	No.	6		
3	Provision for CLO	No.	1	4000	12000
	<b>Sub Total</b>				
	<b>Contingencies @ 10%</b>				
	<b>Sub Total</b>				
	<b>Vat @ 15%</b>				
	<b>Total</b>				

**BULWER DUMPSITE  
CONSTRUCTION OF GUARD HOUSE**

ITEM	DESCRIPTION	UNIT	QUANTITY	RATE	TOTAL
	<b>CONSTRUCTION OF GUARD HOUSE</b>				
1	Site establishment	Sum	1		
2	Construction of security house with blockwork M200 inclusive of brickforce after every two courses	m2	30		
2.1	Supply and apply plaster on the internal walls with 15mm thickness	m2	126		
2.2	Supply and apply plaster on the external walls with 15mm thickness	m2	126		
2.3	Supply and install the concrete slab with 50mm thickness using 15MPa strength	m3	0.8		
2.4	Supply and install roof planks 38x155mm to be 3m in length each	m2	30		
2.5	Supply and install heavy duty iron zinc sheet with 0.5mm thickness	m2	30		
2.6	Supply and install glazing 1x1m with steel frames	No.	8		
2.7	Supply and apply quality (oil paint) PVA paint for the external walls EPL 272	m2	126		
2.8	Supply and apply quality (oil paint) PVA paint for the internal walls EPL 272	m2	126		
2.9	Supply and install rhino board ceiling with all fittings	m2	30		
2.10	Supply and apply white quality (oil paint) PVA to paint ceiling	m2	30		
2.11	Supply and install meranti single door and meranti frames, 3 Lever Union Key lock set with all fittings	No.	6		
2.12	Supply and install door awinings	No.	6		
3	Provision for CLO	No.	1	4000	12000
	<b>Sub Total</b>				
	<b>Contingencies @ 10%</b>				
	<b>Sub Total</b>				
	<b>Vat @ 15%</b>				
	<b>Total</b>				

**NB: This is a 3 months project and local labour rates is R145.**

**RECOMMENDED BY:**

  
**MISS N.HOLIWE**  
**SCM MANAGER**

**APPROVED BY:**

  
**MR. N.C. VEZI**  
**MUNICIPAL MANAGER**

**I acknowledge receipt of this Addendum No.1**


Name:.....

Signature:.....

Date:.....

Name of Tenderer (Company Name):.....



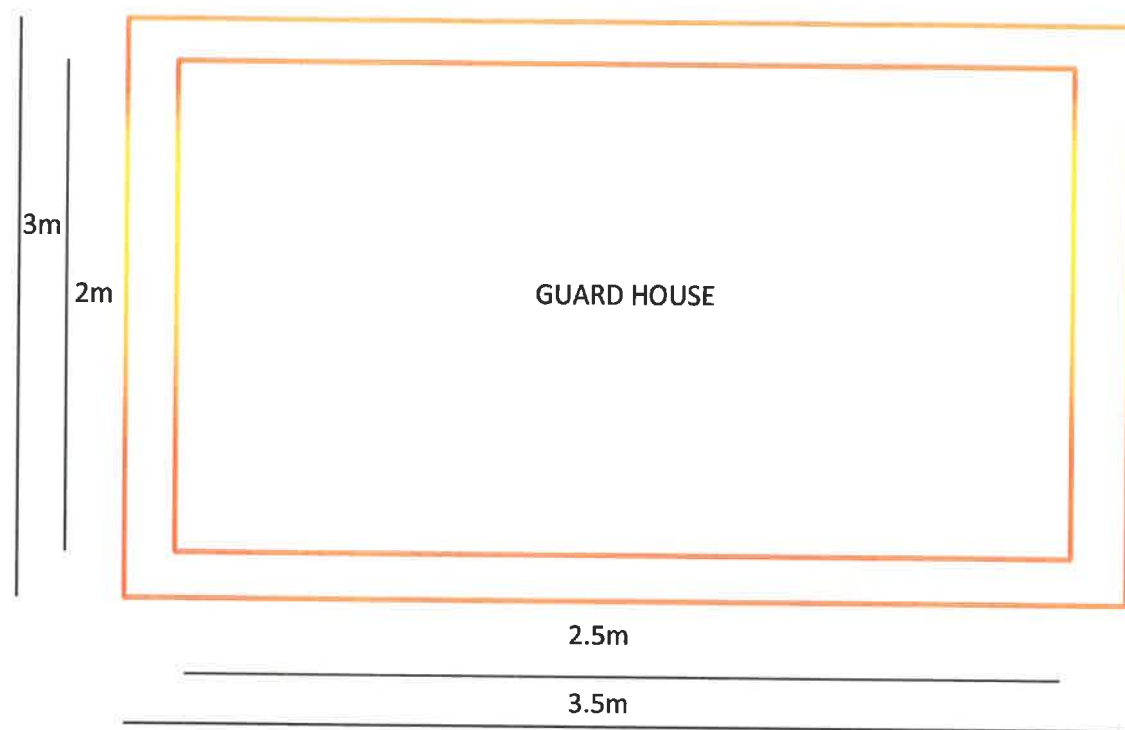

The guard house is 2,5x2m with a thickness of 0.1m (Slab), with a 0,5m apron on each side

$$3,5\text{m} \times 3\text{m} \times 0.1\text{m} = 1.05 \text{ m}^3$$

